


Description:


Double pilot operated check valve with an optional thermal relief. Use for load holding or blocking circuits. Free flow is allowed from the “V” ports to the “C” ports. When pressure is applied to the opposite “V” port flow is allowed back through the “C” port. The pressure to open the check valve is one-fourth of the load on the check valve.



Features:

- Select variation from the FastLine program
- Optional thermal relief protection
- Optional spring ranges to maximum performance
- Optional sealed piston
- Hardened poppet and cage for long life
- Zinc plated exposed steel parts
- Anodized aluminum body for corrosion protection

Flow Characteristics (32 CST / 150 SUS oil at 40C)

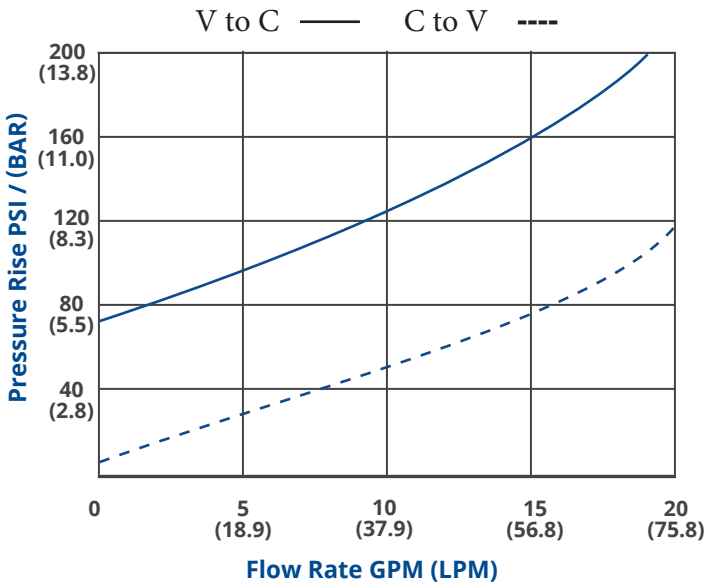

Specifications:

Maximum Pressure (Aluminum)	3000 PSI (207 BAR)
Thermal Relief Setting	5050 PSI (350 BAR)
Maximum Flow	20 GPM (75 LPM)
Port Size	SAE-08
Pilot Ratio	4:1
Body Material	Aluminum
Filtration	ISO 4460
Fluids	Mineral based or synthetics 50-2000 SUS
Approx. Weight	1.3 Lbs.


The data and application materials contained herein are furnished for information only and believed to be reliable. Questions regarding specific applications or performance should be directed to JEM's application department. Since our products are being continuously improved, data contained herein is subject to change without notice. Warranty on FastLine products is 1 year from the date of sale.

JEM Technical
(888) 256-8266
www.jemtechnical.com




JEM Technical Canada Ltd.
(204) 654-1743
www.jemtechnical.ca

Installation Dimensions:

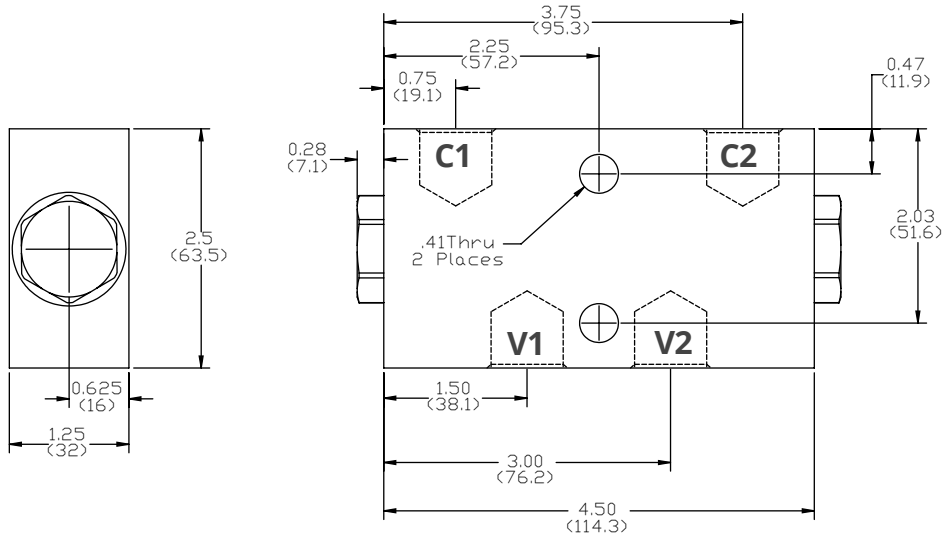

() Parentheses = Millimeters

How To Order:

 Example model code is the in-stock FastLine solution

DCV100 - 408T - - - - 65

Base Part No.

4 Ports
Size SAE 08

Body Material:
Omit = Aluminum
D = Ductile *

Seal Type:
Omit = Buna N
V= Fluorocarbon **
S= Buna w/ piston seal
VS= Fluorocarbon w/ piston seal

Bias Spring:

65 PSI (STD)
100 = 100 PSI (min for piston seals)
200 = 200 PSI
300 = 300 PSI

Thermal Relief Option:

Omit = No thermal relief
1 = Thermal relief on C1 ***
2 = Thermal relief on C2 ***
3 = Thermal relief on C1 & C2

* Ductile bodies have limited availability. Ductile bodies are recommended for working pressures over 3000 PSI.

** Fluorocarbon seals are used when temperatures exceed 212 ° F (100° C).

*** Thermal reliefs can not be used with sealed pistons. Thermal reliefs have a longer lead time.

Typical Cylinder Application

